


Light guide	Q	Quartz
Temperature resistant	C°	<90°C
Shielding of the light supply	FS	Metal coil - glass braid silicon rubber cover
Adapter for light sources	LSA	Only for LS1800 / LS3000 light sources

HIGH PERFORMANCE RING LIGHT

		LS RG15D	LS RG66vF
		228662	227373
Ring light interior diameter	iØ	15	66
Ring light exterior diameter	AØ	26	94
Viewing diameter	ødk		52
Ring light height	RH	26	27-30
Ring body	AL	Black anodised aluminium	Black/natural anodised aluminium
Focal distance, working distance	FA	30-40	25-200
Light spot diameter	FØ	15	5-50
Number of light spots, resolution	PR	18	40
Light emission per light spot	PØ	4	0.7
Light emission		Diffused radiant, homogeneous	VarioFocus radiant, homogeneous
Light strength in focus	P	3.6 Megalux / 630lm	
Light guide length, supply in cm	L	0250	0100

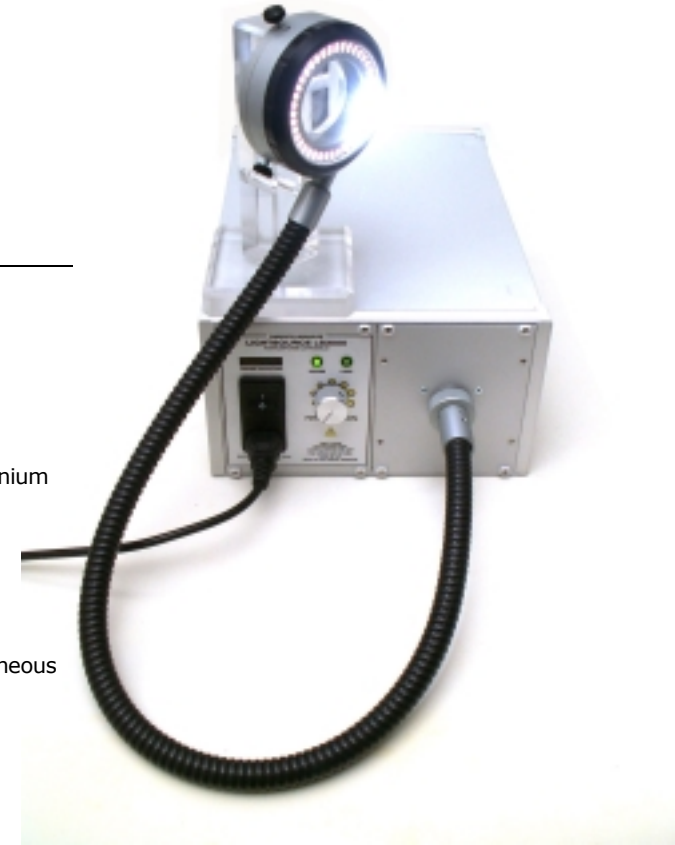

www.FASEROPTIK-HENNING.de

The most diverse working distances can be perfectly lit with the **VarioFocus ring light**

Locating ring on the ring light

High performance ring light for reflecting light, bright field lighting for microscope cameras, image processing (Machine Vision).

Illumination for **fast measurement cycles** for quality analysis

- e.g.. SMD automated assembly equipment, watchmaking industry...





Light supply line sheath depending on application

MP- protective hose

MP



Material	Aluminium with plastic covering
temperature	-20°C to +80°C
Colours	black
Properties	very flexible, high tensile with high peak compressive strength

Flat cable coil - silicone protective hose

MS



Material	Protective hose stainless steel with silicone rubber sheath
temperature	-60°C to +180°C
Colours	grey
Properties	Silicone rubber sheath can be sterilised, is water-tight, and to a large extent resistant to chemicals and solvents, is stress-relieved and very flexible.

PVC hose

PC



Material	Polyvinylchloride (PVC)
temperature	up to approx. 70° C
Colours	black

Stainless steel protective hose

VA















Material	Stainless steel 1.4301
temperature	600°C
Colours	dark grey
Properties	Media resistance conforms to 1.4301 material

Alu- protective hose

AL





Material	Aluminium
temperature	-60°C to +180°C
Colours	silver
Properties	anti-kink protection

Decabon pipe		DK
	Material	Interior pipe made of double-sided coated overlapping aluminium foil, exterior sheath made of high density polyurethane (HD-PE)
	temperature	-25°C to +65°C
	Colours	black (standard)
	Properties	It can be easily formed by hand, retains its shape and does not spring back. It can be bent several times without damage.
PE protective hose		PE
 	Material	PE protective hose
	temperature	-0°C to +80°C
	Colours	black
	Properties	resistant to acids, alkalis and salt solutions / break and impact resistant
Tecalan protective hose		TC
	Material	Tecalan
	temperature	For continuous load -60°C to +100°C, for short-term loading to +130°C
	Colours	black
PU protective hose		PU
 	Material	Electrical discharge protective PU hose
	temperature	-40°C to +80°C
	Colours	black, blue, white
	Properties	High rupture stress, very good stability against cold, oils, fats, acids, alkalis and salt solutions; hardness: Shore A 98 Working pressure, temperature dependent! 12bar at 24°C 5bar at 66°C
PTFE coiled hose		PTFE
  	Material	PTFE coiled hose with glass fibre braiding
	temperature	-70°C to +260°C
	Colours	black
	Properties	non-flammable, chemical resistant
Silicone hose		SL
 	Material	Silicone hose
	temperature	-60°C to +200°C, short-term +260° C
	Colours	grey, black, transparent
	Properties	very flexible, acid and alkali resistant, Shore hardness A 55 ± 5°, autoclavable, ethylene oxide, light scent, non-toxic
PVC hose with fabric insert		GPVC
	Material	PVC hose with natural fabric insert
	temperature	-20°C to +65°C
	Colours	transparent
	Properties	permanently transparent, comfortable flexibility, good aging resistance, KTW approved, food materials approved according to RAL-E71

Fibre type	Acrylic fibre (Polymer Optical Fibre)	Glass fibre silicate glass fibre	Hardcoat fibre hard clad	Quartz fibre	Quartz fibre
Profile	Index step fibre (Si)	Index step fibre (Si)	Index step fibre (Si)	Index step fibre (Si)	Gradient fibre (Gi)
ØD Fibre exterior diameter	250µm 500µm 750µm 1000µm	30µm 50µm 70µm	125µm 225µm 425µm 630µm	155µm 250µm 270µm 415µm	125µm 140µm
Ød Fibre core diameter	240µm 490µm 740µm 990µm	27µm 47µm 67µm	100µm 200µm 400µm 600µm	105µm 200µm 200µm 320µm	85µm 100µm
NA Numerical Aperture	0.47	0.54	0.37	0.22	0.2
2α=ε Light exit angle	56°	65°	43°	25°	~25°
% Damping losses	200dB/km 3.4%/m at 580nm	200dB/km 4.5%/m at 820nm	10dB/km 0.002%/m (at 820 nm)	≥14db/km at 820nm	1dB/km at 13000nm
C° Temperature resistance	92	600	125	300	125

Light exit angle ϵ for various fibre materials

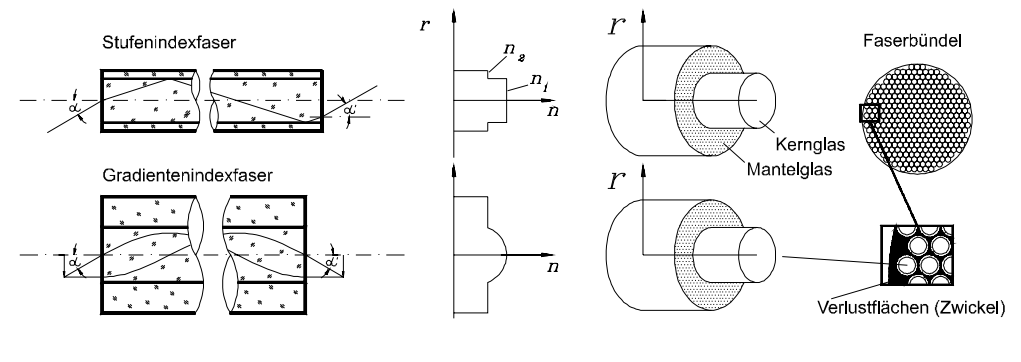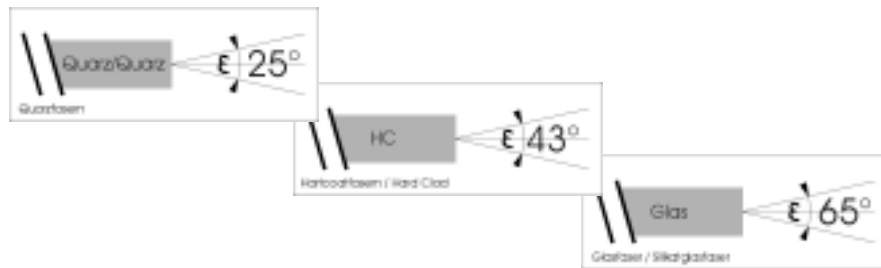

Faseroptik Henning GmbH

Neumarkter Straße 29

D 90584 Allersberg / Germany

Tel. 0049 (0)9176 / 58-0

Fax 0049 (0)9176 / 58-70

kontakt@faseroptik-henning.de

www.faseroptik-henning.de